

# SmartSolar Charge Controllers with VE.Can interface

## MPPT 150/70 VE.Can up to MPPT 150/100 VE.Can



**SmartSolar Charge Controller  
MPPT 150/100-Tr VE.Can  
with optional pluggable display**



**SmartSolar Charge Controller  
MPPT 150/100-Tr VE.Can  
without display**



**Bluetooth sensing:  
Smart Battery Sense**




**Bluetooth sensing:  
BMV-712 Smart Battery Monitor**



**Bluetooth sensing: SmartShunt**



**SmartSolar pluggable display**

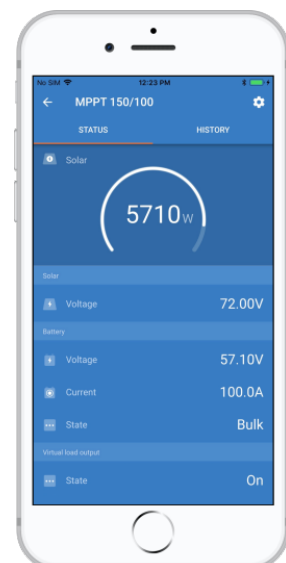

### Ultra-fast Maximum Power Point Tracking (MPPT)

Especially in case of a cloudy sky, when light intensity is changing continuously, an ultra-fast MPPT controller will improve energy harvest by up to 30% compared to PWM charge controllers and by up to 10% compared to slower MPPT controllers.

### Advanced Maximum Power Point Detection in case of partial shading conditions

If partial shading occurs, two or more maximum power points (MPP) may be present on the power-voltage curve.

Conventional MPPTs tend to lock to a local MPP, which may not be the optimum MPP. The innovative SmartSolar algorithm will always maximize energy harvest by locking to the optimum MPP.

### Outstanding conversion efficiency

No cooling fan. Maximum efficiency exceeds 98%.

### Flexible charge algorithm

Fully programmable charge algorithm, and eight pre-programmed algorithms, selectable with a rotary switch (see manual for details).

### Extensive electronic protection

Over-temperature protection and power derating when temperature is high.

PV short circuit and PV reverse polarity protection.

PV reverse current protection.

### Bluetooth Smart built-in

The wireless solution to set-up, monitor, update and synchronise SmartSolar Charge Controllers.

### Internal temperature sensor and optional external battery voltage, temperature and current sensing via Bluetooth

A Smart Battery Sense, a BMV-712 Smart Battery Monitor or a SmartShunt can be used to communicate battery voltage and temperature (and current, in case of a BMV 712 or a SmartShunt) to one or more SmartSolar Charge Controllers.

### VE.Direct or VE.Can

For a wired data connection to a Color Control GX, other GX products, PC or other devices

### Fully discharged battery recovery function

Will initiate charging even if the battery has been discharged to zero volts.

Will reconnect to a fully discharged Li-ion battery with integrated disconnect function.

### VE.Can: the multiple controller solution

Up to 25 units can be synchronised with VE.Can, and up to 10 units with Bluetooth

### Remote on-off

To connect for example to a VE.BUS BMS.

### Programmable relay

Can be programmed to trip on an alarm, or other events.

### Optional: SmartSolar pluggable LCD display

Simply remove the rubber seal that protects the plug on the front of the controller, and plug-in the display.

| SmartSolar Charge Controller with VE.Can interface  | 150/70 VE.Can  | 150/85 VE.Can   | 150/100 VE.Can (also available without Bluetooth) |
|---|--|---|---|
| Battery voltage   | 12/24/48V Auto Select (36V: manual)  |   |   |
| Rated charge current  | 70A  | 85A   | 100A  |
| Nominal PV power, 12V 1a,b)   | 1000W  | 1200W   | 1450W   |
| Nominal PV power, 24V 1a,b)   | 2000W  | 2400W   | 2900W   |
| Nominal PV power, 36V 1a,b)   | 3000W  | 3600W   | 4350W   |
| Nominal PV power, 48V 1a,b)   | 4000W  | 4900W   | 5800W   |
| Max. PV short circuit current 2)  | 50A (max 30A per MC4 conn.)  | 70A (max 30A per MC4 conn.)   |   |
| Maximum PV open circuit voltage   | 150V absolute maximum coldest conditions<br>145V start-up and operating maximum                                  |   |   |
| Maximum efficiency  | 98%  |   |   |
| Self-consumption  | Less than 35mA @ 12V / 20mA @ 48V  |   |   |
| Charge voltage 'absorption'   | Default setting: 14,4 / 28,8 / 43,2 / 57,6V<br>(adjustable with: rotary switch, display, VE.Direct or Bluetooth) |   |   |
| Charge voltage 'float'  | Default setting: 13,8 / 27,6 / 41,4 / 55,2V<br>(adjustable: rotary switch, display, VE.Direct or Bluetooth)      |   |   |
| Charge voltage 'equalization'   | Default setting: 16,2V / 32,4V / 48,6V / 64,8V (adjustable)  |   |   |
| Charge algorithm  | multi-stage adaptive (eight preprogrammed algorithms) or user defined algorithm                                  |   |   |
| Temperature compensation  | -16 mV / -32 mV / -64 mV / °C  |   |   |
| Protection  | PV reverse polarity / Output short circuit / Over temperature  |   |   |
| Operating temperature   | -30 to +60°C (full rated output up to 40°C)  |   |   |
| Humidity  | 95%, non-condensing  |   |   |
| Maximum altitude  | 5000m (full rated output up to 2000m)  |   |   |
| Environmental condition   | Indoor, unconditioned  |   |   |
| Pollution degree  | PD3  |   |   |
| Data communication  | VE.Can, VE.Direct and Bluetooth  |   |   |
| Remote on/off   | Yes (2 pole connector)   |   |   |
| Programmable relay  | DPST AC rating: 240VAC / 4A DC rating: 4A up to 35VDC, 1A up to 60VDC  |   |   |
| Parallel operation  | Yes, parallel synchronised operation with VE.Can (max. 25 units) or Bluetooth (max. 10 units)                    |   |   |
| <b>ENCLOSURE</b>  |  |   |   |
| Colour  | Blue (RAL 5012)  |   |   |
| PV terminals 3)   | 35 mm <sup>2</sup> / AWG2 (Tr models)<br>Two pairs of MC4 connectors (MC4 models)                                | 35 mm <sup>2</sup> / AWG2 (Tr models)<br>Three pairs of MC4 connectors (MC4 models) |   |
| Battery terminals   | 35mm <sup>2</sup> / AWG2   |   |   |
| Protection category   | IP43 (electronic components), IP22 (connection area)   |   |   |
| Weight  | 3 kg   | 4,5kg   |   |
| Dimensions (h x w x d) in mm  | Tr models: 185 x 250 x 95 mm<br>MC4 models: 215 x 250 x 95 mm  | Tr models: 216 x 295 x 103<br>MC4 models: 246 x 295 x 103                           |   |
| <b>STANDARDS</b>  |  |   |   |
| Safety  | EN/IEC 62109-1, UL 1741, CSA C22.2   |   |   |
| <p>1a) If more PV power is connected, the controller will limit input power.</p> <p>1b) The PV voltage must exceed Vbat + 5V for the controller to start. Thereafter the minimum PV voltage is Vbat + 1V.</p> <p>2) A PV array with a higher short circuit current may damage the controller.</p> <p>3) MC4 models: several splitter pairs may be needed to parallel the strings of solar panels<br/>Maximum current per MC4 connector: 30A (the MC4 connectors are parallel connected to one MPPT tracker)</p> |  |   |   |



With VE.Can or Bluetooth up to 25 respectively up to 10 Charge Controllers can be daisy-chained for synchronous charging and connected to a Color Control GX or other GX device  
Each Controller can be monitored individually, for example on a Color Control GX and on the VRM website (VE.Can) or on a smartphone or iPad (Bluetooth)