


8GU1-DEKA

SPECIFICATIONS

| | |
|-----------------------------|------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 36Ah |
| Capacity at C/20 | 31.6Ah |
| Weight | 23.5 lbs. (11 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) - 140°F (60°C) |

For Charging Parameters please refer to www.mkbattery.com
Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

| | |
|-------------|-------------------------------|
| Vent | Self-sealing |
| Electrolyte | Sulfuric acid thixotropic gel |
| Terminal | Y (T873) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

Inches (mm)

| | |
|--------|--|
| Length | 7.71 (196 mm) |
| Width | 5.18 (132 mm) |
| Height | 7.22 (183 mm) <i>Including terminal</i> |

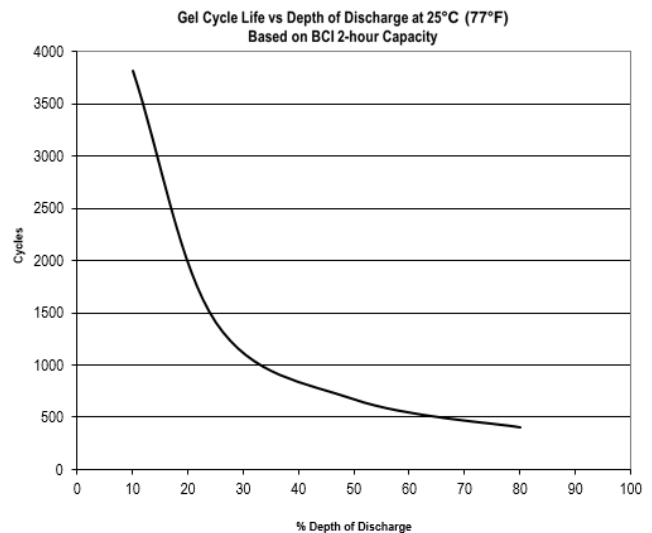

MK Battery

