

MODEL **J185-AGM**  
 VOLTAGE **12**  
 CAPACITY **200Ah @ 20Hr**  
 MATERIAL **Polypropylene**  
 BATTERY **VRLA AGM / Non-Spillable / Maintenance-Free**  
 COLOR **Maroon**  
 WATERING **No Watering Required**



**12 VOLT**

**PHYSICAL SPECIFICATIONS**

| BCI | MODEL NAME | TERMINAL TYPE <sup>6</sup> | DIMENSIONS <sup>9</sup> INCHES (mm) |            |                     | WEIGHT <sup>1</sup> LBS. (kg) | HANDLES      | INSTALLATION ORIENTATION |
|-----|------------|----------------------------|-------------------------------------|------------|---------------------|-------------------------------|--------------|--------------------------|
|     |            |                            | LENGTH                              | WIDTH      | HEIGHT <sup>F</sup> |                               |              |                          |
| 921 | J185-AGM   | M8/DT/LT                   |                                     |            |                     | 122 (55)                      | Braided Rope | Horizontal and Vertical  |
|     |            |                            | 14.97 (380)                         | 6.94 (176) | 14.45 (367)         |                               |              |                          |

**ELECTRICAL SPECIFICATIONS**

| VOLTAGE | Cranking Performance     |                         | Capacity <sup>A</sup> Minutes |           | CAPACITY <sup>B</sup> AMP-HOURS (Ah) |       |       |        | ENERGY (kWh) | INTERNAL RESISTANCE (mΩ) | SHORT CIRCUIT CURRENT (amps) |
|---------|--------------------------|-------------------------|-------------------------------|-----------|--------------------------------------|-------|-------|--------|--------------|--------------------------|------------------------------|
|         | C.C.A. <sup>D</sup> @0°F | C.A. <sup>E</sup> @32°F | @ 25 Amps                     | @ 75 Amps | 5-Hr                                 | 10-Hr | 20-Hr | 100-Hr | 100-Hr       |                          |                              |
| 12      |                          |                         |                               |           |                                      |       |       |        |              | 4.5                      | 2790                         |
|         | -                        | -                       | 389                           | 110       | 157                                  | 171   | 200   | 212    | 2.54         |                          |                              |

**CHARGING INSTRUCTIONS**

| CHARGER VOLTAGE SETTINGS (AT 77°F/25°C) |                        |       |       |       |
|---|------------------------|-------|-------|-------|
| SYSTEM VOLTAGE                          | 12V                    | 24V   | 36V   | 48V   |
| Maximum Charge Current (A)              | 20% of C <sub>20</sub> |       |       |       |
| Absorption Voltage (2.40 V/cell)        | 14.40                  | 28.80 | 43.20 | 57.60 |
| Float Voltage (2.25 V/cell)             | 13.50                  | 27.00 | 40.50 | 54.00 |

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.


**CHARGING TEMPERATURE COMPENSATION**

| ADD   | SUBTRACT  |
|---|---|
| 0.005 volt per cell for every 1°C below 25°C<br>0.0028 volt per cell for every 1°F below 77°F | 0.005 volt per cell for every 1°C above 25°C<br>0.0028 volt per cell for every 1°F above 77°F |

**OPERATIONAL DATA**

| OPERATING TEMPERATURE   | SELF DISCHARGE   |
|---|--|
| -4°F to 122°F (-20°C to 50°C)<br>At temperatures below 32°F (0°C) maintain a state of charge greater than 60% | Less than 3% per month depending on storage temperature conditions |


**RECYCLE RESPONSIBLY**

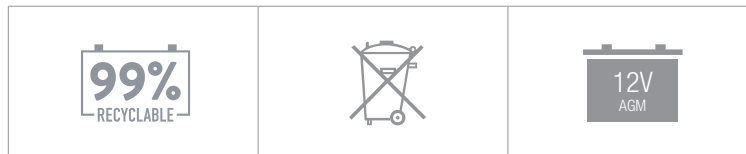


**STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE**

| PERCENTAGE CHARGE | CELL | 12 VOLT |
|-------------------|------|---------|
| 100               | 2.14 | 12.84   |
| 75                | 2.09 | 12.54   |
| 50                | 2.04 | 12.24   |
| 25                | 1.99 | 11.94   |
| 0                 | 1.94 | 11.64   |


## TROJAN J185-AGM PERFORMANCE

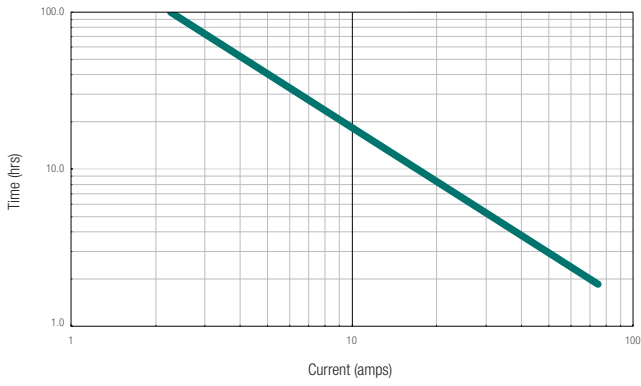


## PERCENT CAPACITY VS. TEMPERATURE

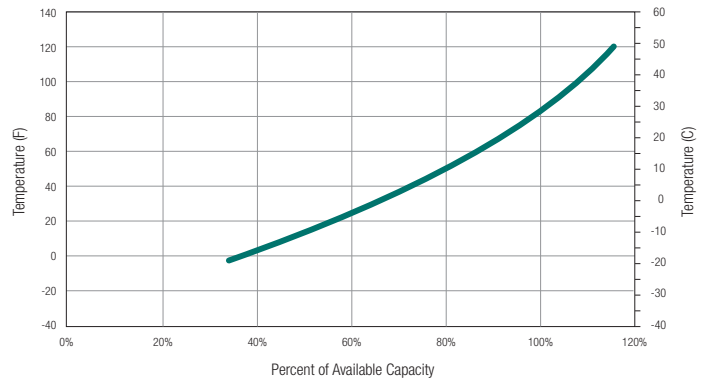

## BATTERY DIMENSIONS (shown with DT)

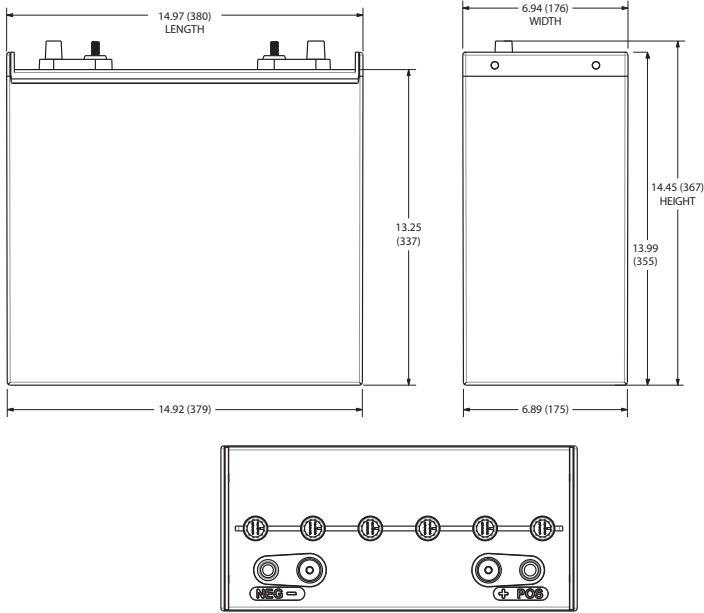

## SELF DISCHARGE VS. TIME<sup>H</sup>

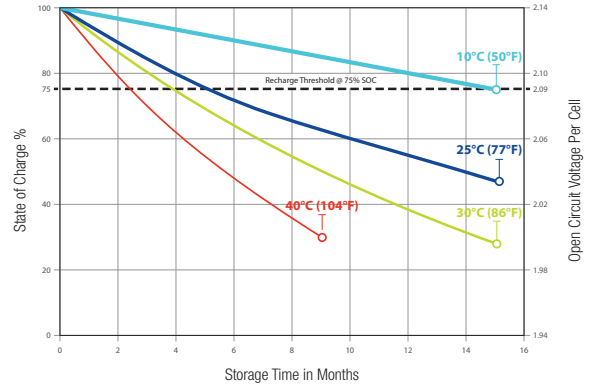

## TERMINAL CONFIGURATIONS<sup>G</sup>

| 15 | M8  | M8  |
|----|---|---|
|    | <b>Battery Height with Terminal in Inches (mm)</b><br>14.07 (357) | <b>Torque Values in-lb (Nm)</b><br>Bolt: 85 – 90 (10 – 11)  |
|    | <b>Battery Height with Terminal in Inches (mm)</b><br>15.57 (395) | <b>Torque Values in-lb (Nm)</b><br>Connection to M8: 85 – 90 (10-11)<br>Connection to LT: 65 – 75 (7.5 – 8.5) |
|    |   | <b>Bolt Size</b><br>M8 x 1.25   |

| 6 | DT  | AUTOMOTIVE POST & STUD   |
|---|---|--|
|   | <b>Battery Height with Terminal in Inches (mm)</b><br>14.45 (367) | <b>Torque Values in-lb (Nm)</b><br>Connected to Stud: 95 – 105 (11 – 12)<br>Connected to AP: 50 – 70 (6 – 8) |
|   |   | <b>Bolt Size</b><br>5/16" – 18   |

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20-Hour rate and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.

- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- G. Terminal images are representative only.
- H. A boost charge should be performed every 6 months when batteries are in storage.
- I. Weight may vary.



Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.

