



Model BB8DH

270AH 12V
LiFePO₄ Deep Cycle Battery
Data sheet

Electrical Specification

Voltage	12V
Capacity	270AH
Operating Temperature	-4°F to 135°F (-20°C to 57.2°C)
Efficiency	99%
Self Discharge	2-3% per month
Maximum Series Voltage	48V
Cycles	3K-5K
Built-in BMS	Internal
Resistance	5 mΩ
Usable DoD	100%


Discharging Specification

Max Discharge Current	300A
Peak Discharge Current	500A for 30 Seconds
Surge for Loads over 500A	.5 Seconds
Recommended LVD	10.5V
BMS Discharge Voltage Cut-Off	10V
Reconnect Voltage	10V
Short Circuit Protection	Yes

Recognized Specification

Certifications	UN38.3, ULCSA-62133-2
Shipping Class	UN3480, Class 9

Drawing Specification

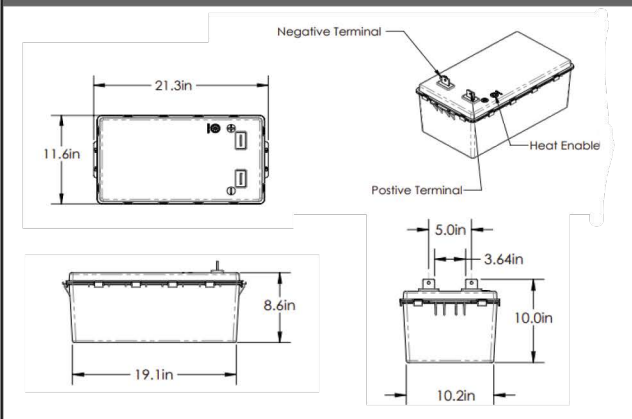

Charging Specification

Recommended Charge Current	.5c
Max Charge Current	135A
Absorption Voltage	14.2V-14.6V
Float Voltage	13.2V-13.8V
Equalization Voltage (if applicable)	14.4V
Absorption Time	60-90 Minutes per 270AH battery bank
BMS Charge Current Cut-Off	.5C Recommended
Recharge/Rebulk Voltage	13.3V
BMS Cell Balancing Voltage Range	14.2V-14.6V
High BMS Voltage Protection	14.7VDC
Temperature Compensation	No

Mechanical Specification

Dimensions	21.29"L X 1 1.59"W X 10.01"H
Weight	81.4 lbs.
Terminal Type	.25" Brass
Terminal Hole	3/8" hole and 3/8" or 5/16" hardware is suggested
Terminal Torque	9-11 Ft-lb.
Case Material	ABS Fire Rated
Cell Type - Electrolyte	LiFePO ₄
Sealed and Water Resistant Case	Non-Submersible
Heat enable Terminal	Female M4 Thread

Temperature Specification

Discharge Temperature	-4°F to 135°F (-20°C to 57.2°C)
Charge Temperature	25°F - 135°F
Storage Temperature	-10°F to 140°F (-23°C to 60°C)
BMS High Temperature Cut-Off	>135°F
BMS Reconnect Temperature	<135°F




Model BB8DH


270AH 12V
LiFePO₄ Deep Cycle Battery
Data sheet

Performed Operation Data


.5C Discharge with Temperature Variations

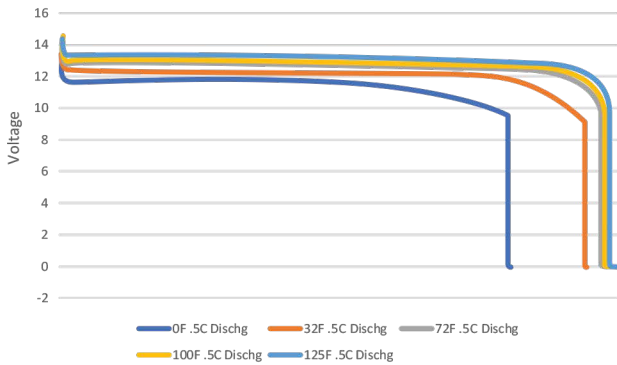


1C Discharge Voltage with Temperature Variations

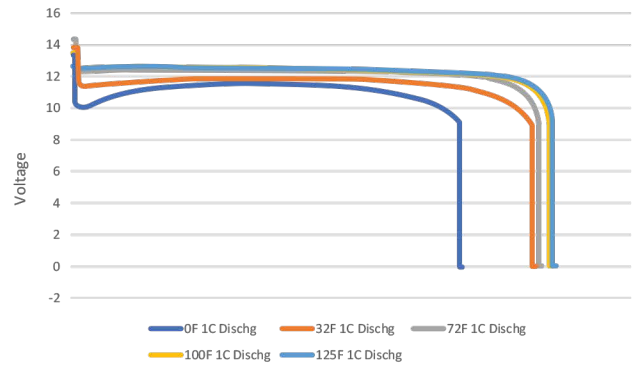


.5C State of Charge with Temperature Variations

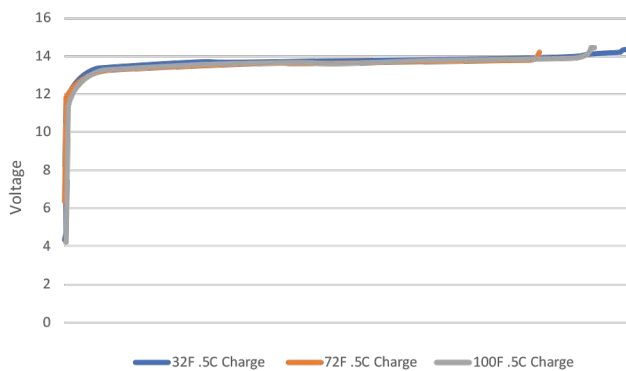

Standard Charge Curve with 3 Stage Charger

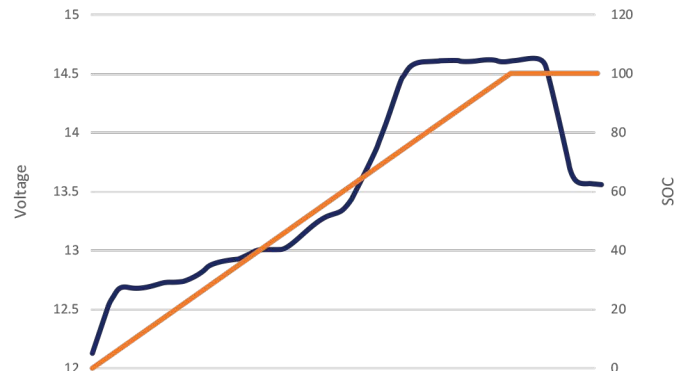

8DH Heater Draw Expected in a 24Hr Period

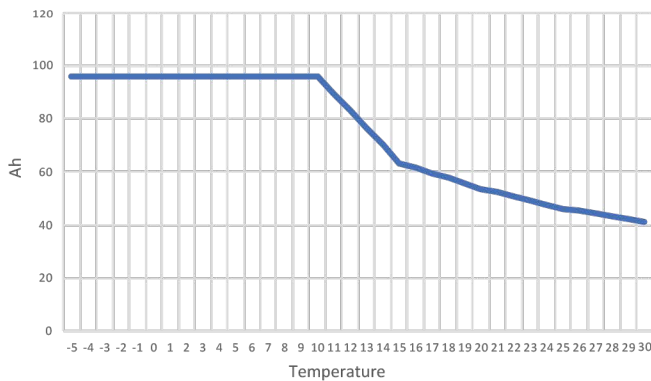

	>32°F 0Ah	25°F 24 Hr Period 46Ah Consumed	20°F 24 Hr Period 54Ah Consumed	15°F 24 Hr Period 65Ah Consumed	<10°F 96Ah
Current Draw [A]	4.0	4.0	4.0	4.0	4.0
ON	7.6	3.73	11.33	30.39	64.35
OFF	5.66	4.45	10.11	22.63	53.73
25F	4.55	4.91	9.46	18.2	46.17
Total Cycle Time					
Ah One Cycle					
Ah Expected (24 Hr Period)					

*Note: The storage temperature range is -10°F to 140°F (-23°C to 60°C). We recommend bringing the Battle Born Batteries to a 100% charge and then disconnecting them completely for storage. After six months in storage, your batteries will remain 75 - 80% charged.

Storing batteries in subzero weather (-15°F or more) has the potential to crack the ABS plastic and more importantly could cause a faster loss of capacity, in some cases drastically more than the typical 2 - 4% per month loss.