


BSP Panel Series - BSP75-12-L

Preliminary Data Sheet

The BSP Panel Series is a line of outdoor solar modules that offers efficient solar cell technology combined with quality design and construction. The impact resistant glass surface and robust anodized aluminum frame can easily mount to optional pole mount brackets.

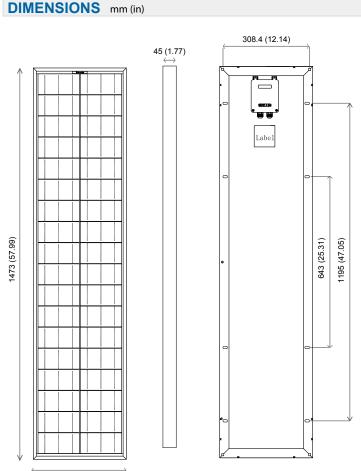

350 (13.78)

The BSP Panel Series features:

- High performance multi-crystalline cells
- High energy yields in a wide variety of climates
- Anodized aluminum frame provides for easy mounting

ELECTRICAL CHARACTERISTICS

Maximum power (P _{max}) ⁽¹⁾	75W
Open circuit voltage (V_{oc})	22.85V
Maximum power voltage (V_{mp})	19.04V
Short circuit current (I _{sc})	4.26A
Maximum power current at (I _{mp})	4.05A

1. Values at Standard Test Conditions (STC): 1000W/m² irradiance, AM 1.5 solar spectrum and 25°C module temperature

MECHANICAL CHARACTERISTICS

Length: inches (mm)	57.99 (1473)
Width: inches (mm)	13.78 (350)
Thickness: inches (mm)	1.77 (45)
Weight: lbs (kg)	15.43 (7)

WARRANTY

10 year warranty

CERTIFICATIONS

Œ