

PERC 5 BUSBAR CELLS

380 POWER OUTPUT

19% MAXIMUM EFFICIENCY

**-0**, **+1.5%**POWER TOLERANCE

10/25 Year PRODUCT/PERFORMANCE WARRANTY







**Crossroads Solar** manufactures solar panels in **South Bend**, **IN** 



Our core mission is to provide **jobs** and life training opportunities for recently released felons



We make solar panels because it is **good for the planet** 



We help remake people because it is **good for our communities** 

Our panels are American made with automated equipment, from top quality components, and certified to IEC 61730 & IEC 61215 standards. They come with a 10 year product and a 25 year performance warranty, consistent with industry standards.

#### 25 YEAR PERFORMANCE WARRANTY



<b>Electrical Performance</b>			
Power Output	$\mathbf{P}_{\text{max}}$	380	W
<b>Module Efficiency</b>	$\eta_{_{m}}$	19	%
Tolerance		1.5	%
<b>Short Circuit</b>			
Current	$I_{SC}$	9.9	Α
<b>Open Circuit</b>			
Voltage	$V_{OC}$	49	V
Rated Current	$I_{mp}$	9.35	A
Rated Voltage	$V_{\text{mp}}$	40.55	V
<b>Fuse Rating</b>		20	A

## **Thermal Characteristics**

Normal Operacting Cell		
	$45 \pm 2$	$^{\circ}\mathrm{C}$
Temperature (NOCT)		
Temperature Coefficient of $P_{max}$	-0.38	%/K
Temperature Coefficient of $V_{\rm OC}$	-0.36	%/K
Temperature Coefficient of I <sub>SC</sub>	0.068	%/K

# **Operating Conditions**

Maximum System Voltage	1500Vdc
<b>Operating Temperature Range</b>	-40 °C (-40 °F) to
	85 °C (185 °F)
<b>Maximum Series Fuse Rating</b>	20
Fire Safety Classification	Type 1 (U.S.) Class C (Canada)
Hail Safety Impact Velocity	25mm at 23m/s

# **Construction Materials**

Front Glass	3.2mm (tempered, low iron, ARC)
Frame	Anodized Aluminum
Encapsulant	EVA
Junction Box	IP 67
Cables	1 meter
Connector	MC4

# **Packaging Information**

Number of modules per pallet	26
<b>Pallet Dimensions</b>	1200mm x 1000mm x 2000mm (47.2in x 39.4in x 78.7in)
Pallet Weight	600kg
Number of pallets per container	28

## **General Characteristics**


Solar Cells	G1, Mono Crystalline Silicon
	$158.75$ mm x $158.75$ mm $\pm 0.25$ mm
Cell Orientation	72 cells (6x12)
Module	
Dimension	2011mm x 1021mm x 40mm
	(79.17in x 39.96in x 1.575in)
$(L \times W \times H)$	
Weight	22kg (48.5lb)

### **Qualifications and Certifications**

UL/IEC 61730 & 61215

## PANEL DRAWING

**Units:** mm

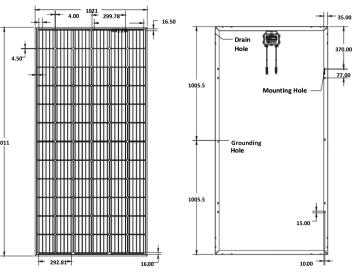

Front View Back View

#### **Crossroads Solar**

Website: crossroads-solar.com Email: patrickregan@crossroads-solar.com

Tel: 607-759-1058