FULL FORCE BATTERY

FFD200-8

FULL FORCE SERIES | DEEP CYCLE AGM

CYCLING CAPACITY

20 Hour Rate	**200 Amp Hours**

RESERVE CAPACITY

Reserve @25 AMPS	**390 Minutes**	Reserve @56 AMPS	**140 Minutes**

ELECTRICAL SPECIFICATIONS

Nominal Voltage	**8 Volt**
C100	**220 AH**
C20	**200 AH**
C10	**188 AH**
C5	**164 AH**
CCA	**1150 Amps**
CA or MCA	**1420 Amps**
Internal Resistance	**2.3 mΩ**

MECHANICAL SPECIFICATIONS

Group Size	**GC8H**	
Terminal Type	**M8**	
Terminal Torque	**5.8 - 6.7** ft/lbs **62 - 80** lbs/in **7 - 9** Nm	
Height (w/ terminal)	**11.02"**	**280 mm**
Height (case only)	**10.90"**	**277 mm**
Width	**7.17"**	**182 mm**
Length	**10.31"**	**262 mm**
Weight	**82.7 lbs**	**37.5 kg**
Case Type	**ABS Plastic** Flame Res. Rating UL94-HB	

DISCHARGE TABLE (Constant Current)

Time	Amps	Rate
20hr	9.0	0.05 CA
10hr	16.5	0.10 CA
8hr	20.0	0.13 CA
5hr	29.5	0.20 CA
3hr	45.5	0.33 CA
2hr	63.2	0.50 CA
1hr	102	1.00 CA

DISCHARGE PROFILE (Constant Current)

8-Volt Battery *Temperature: 77°F (25°C)*

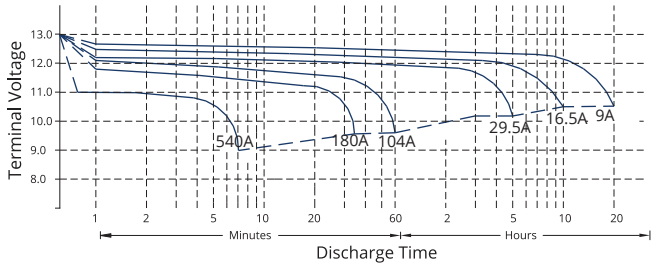

- All listed ratings are @ 100% SoC, T=77°F (25°C), 1.75VPC unless otherwise specified.
- Specifications listed are for estimation purposes only. Battery performance can vary depending on application. Battery design subject to change.

BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

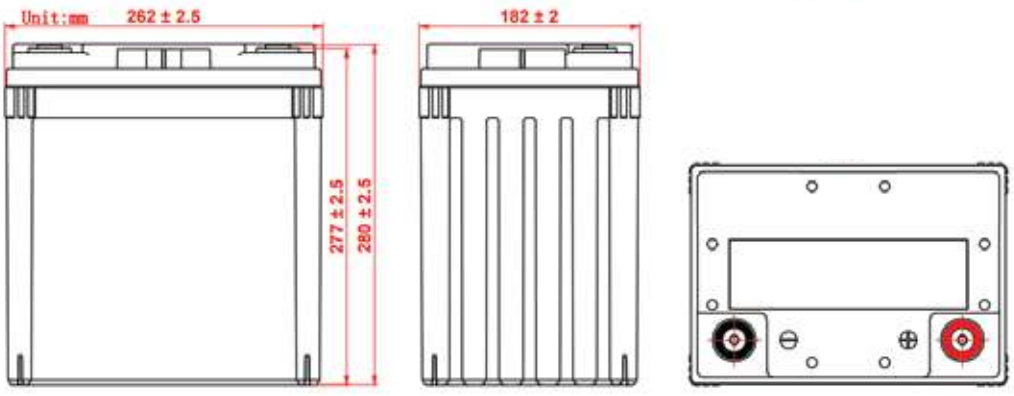

Terminal: M8 + TP



TEMPERATURE vs CAPACITY

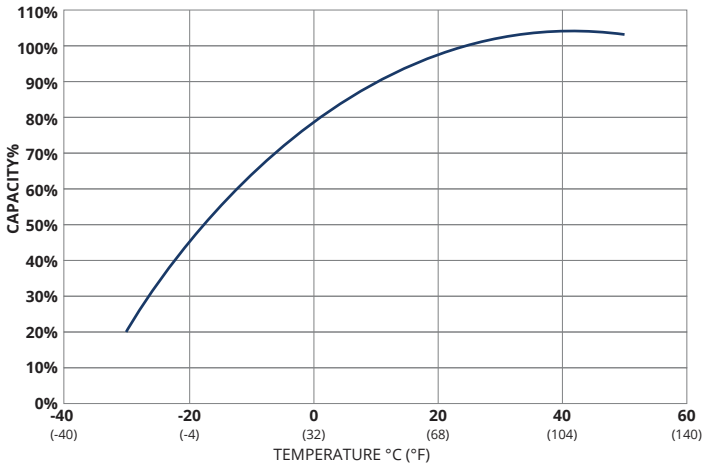

STATE of CHARGE (SOC) vs OPEN CIRCUIT VOLTAGE (OCV)

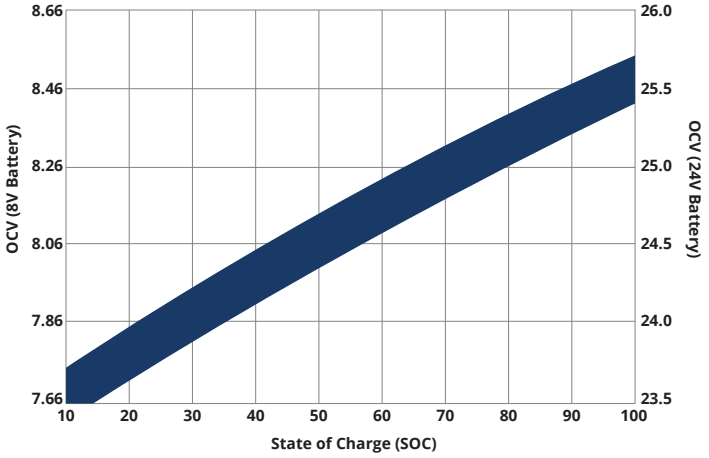

SELF DISCHARGE vs TIME/TEMPERATURE

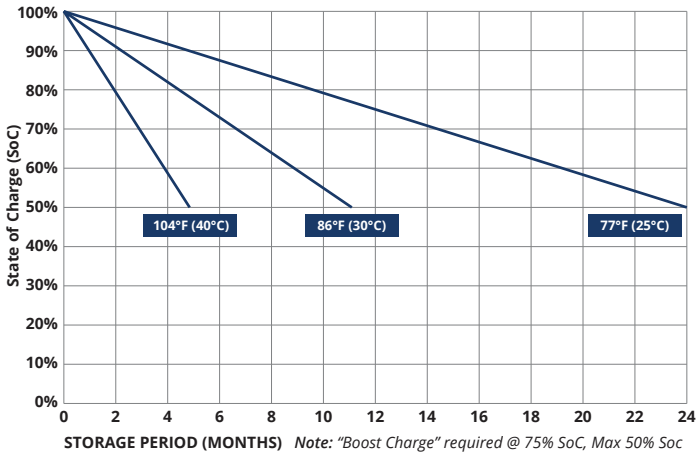

Note: "Boost Charge" required @ 75% SoC, Max 50% Soc

CYCLE LIFE vs DEPTH of DISCHARGE (DOD)

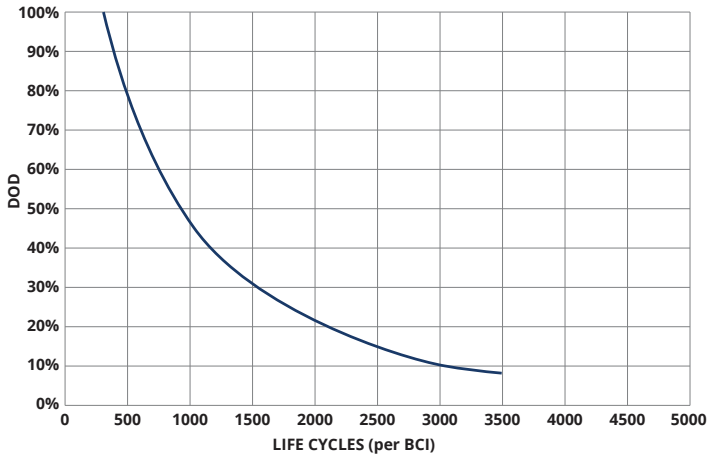

TEMPERATURE RANGE SPECIFICATIONS

Condition	Recommended	Maximum	Recommended	Maximum
Storage	5°F to 122°F	-40°F to 160°F	-15°C to 50°C	-40°C to 71°C
Operation	5°F to 104°F	-40°F to 160°F	-15°C to 40°C	-40°C to 71°C
Charge with TC	5°F to 122°F	-40°F to 160°F	-15°C to 50°C	-40°C to 71°C
Charge w/o TC	32°F to 104°F	5°F to 122°F	0°C to 40°C	-15°C to 50°C

***TC=** Temperature Compensation*

CHARGE VOLTAGES

	Battery Voltages			
Charge Stage	**8V**	**24V**	**36V**	**48V**
Bulk	9.60V	28.80V	43.00V	58.00V
Absorption	9.40V	28.00V	42.00V	56.00V
Float	9.00V	27.00V	40.50V	54.00V

TC Factor: (-2mV°F/cell) or (-4mV°C/cell)

TERMINAL TORQUE SPECS

M5TAS	M6	M8	M10	M6M (Stud)	M8M (Stud)	M10M(Stud) & 3/8" Stud	FR45	TP06 (AP)	TP08/TP68 (AP)	AP
1.67-2.5ft-lbs	3.3-4.8ft-lbs	5.2-6.7ft-lbs	8.1-10.3ft-lbs	2.6-3.7ft-lbs	4.4-5.9ft-lbs	7.4-8.8ft-lbs	4.8-6.3ft-lbs	2.6-3.3ft-lbs	4.6-6.3ft-lbs	4.2-5.8ft-lbs
20-30lbs-in	40-57.5lbs-in	62-80lbs-in	97-124lbs-in	31-44lbs-in	53-71lbs-in	88.5-106lbs-in	57-75lbs-in	31-40lbs-in	55-75lbs-in	50-70lbs-in
2.26-3.39Nm	4.5-6.5Nm	7-9Nm	11-14Nm	3.5-5Nm	6-8Nm	10-12Nm	6.5-8.5Nm	3.5-4.5Nm	6.2-8.5Nm	5.6-7.9Nm

ISO CERTIFIED

9001:2008 Quality Management System
14001:2004 Environmental Management System
18001:2007 Occupational Health & Safety Management System

DELIVERY APPROVED!
LAND, SEA & AIR

Fullriver batteries are sealed lead acid batteries made with Absorbed Glass Mat (AGM) technology. The electrolyte is absorbed into the fiberglass separator material rather than in a free-flowing liquid form. Fullriver batteries are non-spillable electric storage batteries. They are excepted from the requirements of DOT's hazardous materials regulations, since they adhere to the requirements of code 49 CFR Section 173.159(D) - **(CLASSIFIED APPROVED: DOT, CFR, HMR49, IATA, ICAO67, IMDG27)**

REV: 05/08/2025