

# SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US



SB3.0-1SP-US-41 / SB3.8-1SP-US-41 / SB5.0-1SP-US-41 / SB6.0-1SP-US-41 / SB7.0-1SP-US-41 / SB7.7-1SP-US-41 / SB3.0-1TP-US-41 / SB3.8-1TP-US-41 / SB5.0-1TP-US-41 / SB6.0-1TP-US-41 / SB7.0-1TP-US-41 / SB7.7-1TP-US-41



## Value-Added Improvements

- SunSpec certified technology for cost-effective module-level shutdown
- Advanced AFCI compliant to UL 1699B for arc fault protection

## Reduced Labor

- New Installation Assistant with direct access via smartphone minimizes time in the field
- Advanced communication interface with fewer components creates 50% faster setup and commissioning

## Optimized Power Production

- ShadeFix, SMA's proprietary shade management solution, produces more power than alternatives
- Reduced component count provides maximum system reliability

## Trouble-Free Service

- SMA Service Mobile App provides simplified, expedited field service
- Equipped with SMA Smart Connected, a proactive service solution that is integrated into Sunny Portal

## SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US

Power with a purpose

The residential PV market is changing rapidly. Your bottom line matters more than ever—so we've designed a superior residential solution to help you decrease costs at every stage of your business operations. The Sunny Boy 3.0-US/3.8-US/5.0-US/6.0-US/7.0-US/7.7-US join the SMA lineup of field-proven solar technology backed by the world's #1 service team. This improved residential solution features ShadeFix, SMA's proprietary technology that optimizes system performance. ShadeFix also provides superior power production with a reduced component count versus competitors, which provides maximum reliability. No other optimized solution generates more power or is as easy as systems featuring SMA ShadeFix and SunSpec certified devices. Finally, SMA Smart Connected will automatically detect errors and initiate the repair and replacement process so that installers can reduce service calls and save time and money.

Technical data	Sunny Boy 3.0-US		Sunny Boy 3.8-US		Sunny Boy 5.0-US	
	208 V	240 V	208 V	240 V	208 V	240 V
Input (DC)						
Max. PV power	4800 Wp		6144 Wp		8000 Wp	
Max. DC voltage	600 V					
Rated MPP voltage range	155 - 480 V		195 - 480 V		220 - 480 V	
MPPT operating voltage range	100 - 550 V					
Min. DC voltage / start voltage	100 V / 125 V					
Max. operating input current per MPPT	10 A					
Max. short circuit current per MPPT	18 A					
Number of MPPT tracker / string per MPPT tracker	2/1				3 / 1	
Output (AC)						
AC nominal power	3000 W	3000 W	3330 W	3840 W	5000 W	5000 W
Max. AC apparent power	3000 VA	3000 VA	3330 VA	3840 VA	5000 VA	5000 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	14.5 A	12.5 A	16.0 A	16.0 A	24.0 A	21.0 A
Power factor (cos φ) / harmonics	1 / < 4 %					
Output phases / line connections	1 / 2					
Efficiency						
Max. efficiency	97.2 %	97.6 %	97.3 %	97.6 %	97.3 %	97.6 %
CEC efficiency	96.0 %	96.5 %	96.5 %	96.5 %	96.5 %	97.0 %
Protection devices						
DC disconnect device / DC reverse polarity protection	● / ●					
Ground fault monitoring / Grid monitoring	●					
AC short circuit protection	●					
All-pole sensitive residual current monitoring unit (RCMU)	●					
Arc fault circuit interrupter (AFCI)	●					
Protection class / overvoltage category	I / IV					
General data						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Temperature range: operating / non-operating	-25°C ...+60°C / -40°C ...+60°C					
Environmental protection rating	NEMA 3R					
Noise emission (typical)	39 dB(A)					
Internal power consumption at night	< 5 W					
Topology / cooling concept	transformerless / convection					
Features						
Ethernet ports	2					
Secure Power Supply	● *					
Display (2 x 16 characters)	●					
2.4 GHz WLAN / External WLAN antenna	●/○					
ShadeFix technology for string level optimization	●					
Cellular (4G / 3G) / Revenue Grade Meter	○/○ **					
Warranty: 10 / 15 / 20 years ***	●/○/○					
Certificates and approvals	UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment					
● Standard features   ○ Optional features   — Not available						
NOTE: US inverters ship with gray lids.   Data at nominal conditions   * Not compatible with SunSpec shutdown devices   **Standard in SBX.X-1TP-US-41						
Type designation	SB3.0-1SP-US-41 / SB3.0-1TP-US-41		SB3.8-1SP-US-41 / SB3.8-1TP-US-41		SB5.0-1SP-US-41 / SB5.0-1TP-US-41	

● Standard features ○ Optional features – Not available

NOTE: US inverters ship with gray lids. Data at nominal conditions \* Not compatible with SunSpec shutdown devices \*\*Standard in SBX.X-1TP-US-41

Type designation SB3.0-1SP-US-41 / SB3.0-1TP-US-41 SB3.8-1SP-US-41 / SB3.8-1TP-US-41 SB5.0-1SP-US-41 / SB5.0-1TP-US-41

#### Accessories



External WLAN antenna  
EXTANT-US-40



SunSpec Certified  
Rapid Shutdown  
Receivers




Revenue Grade  
Meter Kit  
RGM05KIT-US-10



Cellular Modem Kit  
CELLMODKIT-US-10

\*\*\* Listed warranty terms are applicable in SMA-designated primary support countries, including the U.S., Canada, and Mexico. Reduced terms or restrictions may apply in other Americas regions and territories including the Pacific and Caribbean.

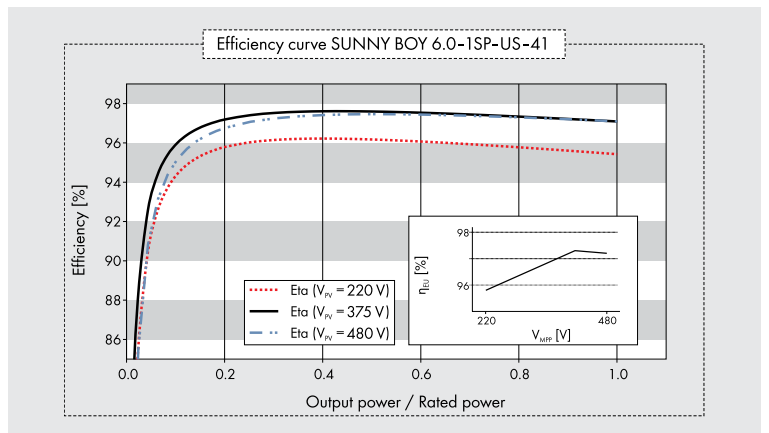

Technical data	Sunny Boy 6.0-US		Sunny Boy 7.0-US		Sunny Boy 7.7-US	
	208 V	240 V	208 V	240 V	208 V	240 V
Input (DC)						
Max. PV power	9600 Wp		11200 Wp		12320 Wp	
Max. DC Voltage	600 V					
Rated MPP Voltage range	220 – 480 V		245 - 480 V		270 - 480 V	
MPPT operating voltage range	100 – 550 V					
Min. DC voltage / start voltage	100 V / 125 V					
Max. operating input current per MPPT	10 A					
Max. short circuit current per MPPT	18 A					
Number of MPPT tracker / string per MPPT tracker	3 / 1					
Output (AC)						
AC nominal power	5200 W	6000 W	6660 W	7000 W	6660 W	7680 W
Max. AC apparent power	5200 VA	6000 VA	6660 VA	7000 VA	6660 VA	7680 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 – 229 V	211 – 264 V	183 – 229 V	211 – 264 V	183 – 229 V	211 – 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	25.0 A	25.0 A	32.0 A	29.2 A	32.0 A	32.0 A
Power factor (cos ϕ) / harmonics	1 / < 4 %					
Output phases / line connections	1 / 2					
Efficiency						
Max. efficiency	97.3 %	97.7 %	97.3 %	97.9 %	97.3 %	97.5 %
CEC efficiency	96.5 %	97.0 %	96.5 %	97.0 %	96.5 %	97.0 %
Protection devices						
DC disconnect device / DC reverse polarity protection	● / ●					
Ground fault monitoring / Grid monitoring	●					
AC short circuit protection	●					
All-pole sensitive residual current monitoring unit (RCMU)	●					
Arc fault circuit interrupter (AFCI)	●					
Protection class / overvoltage category	I / IV					
General data						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging Dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Temperature range: operating / non-operating	-25°C ...+60°C / -40°C ...+60°C					
Environmental protection rating	NEMA 3R					
Noise emission (typical)	39 dB(A)		45 dB(A)			
Internal power consumption at night	< 5 W					
Topology / cooling concept	transformerless / convection		transformerless / fan			
Features						
Ethernet ports	2					
Secure Power Supply	● *					
Display (2 x 16 characters)	●					
2.4 GHz WLAN / External WLAN antenna	●/○					
ShadeFix technology for string level optimization	●					
Cellular (4G / 3G) / Revenue Grade Meter	○/○ **					
Warranty: 10 / 15 / 20 years ***	●/○/○					
Certificates and approvals	UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment					
● Standard features   ○ Optional features   – Not available						
NOTE: US inverters ship with gray lids.   Data at nominal conditions   * Not compatible with SunSpec shutdown devices   **Standard in SBX.X-1TP-US-41						
Type designation	SB6.0-1SP-US-41 / SB6.0-1TP-US-41		SB7.0-1SP-US-41 / SB7.0-1TP-US-41		SB7.7-1SP-US-41 / SB7.7-1TP-US-41	

## POWER+ SOLUTION

The SMA Power+ Solution combines legendary SMA inverter performance and SunSpec certified shutdown devices in one cost-effective, comprehensive package. In addition, SMA ShadeFix technology optimizes power production and provides greater reliability than alternatives.

This rapid shutdown solution fulfills UL 1741, NEC 2014, and NEC 2017 requirements and is certified to the power line-based SunSpec Rapid Shutdown communication signal over DC wires, making it the most simple and cost-effective rapid shutdown solution on the market.





### SIMPLE, FLEXIBLE DESIGN

Speed the completion of customer proposals and maximize the efficiency of your design team with the Sunny Boy-US series, which provides a new level of flexibility in system design by offering:

- » Hundreds of stringing configurations and multiple independent MPPTs
- » SMA's proprietary ShadeFix technology optimizes power production
- » Diverse application options including on- and off-grid compatibility



### VALUE-DRIVEN SALES ENABLEMENT

SMA wants to enable your sales team by arming them with an abundance of feature/benefit support. Show your customers the value of the Sunny Boy-US series by utilizing:

- » The opportunity to join the SMA PowerUP network of installers who receive in-depth training, enhanced service, and prioritized marketing support
- » SMA's 35 year history and status as the #1 global inverter manufacturer instills homeowners with peace of mind and the long-term security they demand from a PV investment
- » The most economical solution for shade mitigation with superior power production



### IMPROVED STOCKING AND ORDERING

Ensure that your back office business operations run smoothly and succinctly while mitigating potential errors. The Sunny Boy-US series can help achieve cost savings in these areas by providing:

- » An integrated DC disconnect that simplifies equipment stocking and allows for a single inverter part number
- » All communications integrated into the inverter, eliminating the need to order additional equipment



### STREAMLINED INSTALLATION AND COMMISSIONING

Expedite your operations in the field by taking advantage of the new Sunny Boy's installer-friendly feature set including:

- » Direct access via smartphone and utilization of SMA's Installation Assistant, which minimizes time/labor spent in the field and speeds the path to commissioning
- » Simple commissioning and monitoring setup in a single online portal
- » The fastest, easiest installation thanks to SMA ShadeFix and SunSpec certified shutdown devices



### SUPERIOR SERVICE

SMA understands the factors that contribute to lifetime PV ownership cost, that's why the Sunny Boy-US series was designed for maximum reliability and backstopped by an unmatched service offering. Benefit from:

- » SMA Smart Connected, a proactive service solution integrated into Sunny Portal that automatically detects errors and initiates the repair and replacement process
- » The SMA Service Mobile App, which provides simplified, expedited field service