


SLP020S-12U


High Efficiency Monocrystalline PV Module

Electrical Characteristics	SLP020S-12U
Product code	020031201A
Maximum power (Pmax)	20W
Voltage at Pmax (Vmp)	18.53V
Current at Pmax (Imp)	1.27A
Open-circuit voltage (Voc)	21.37V
Short-circuit current (Isc)	1.34A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%

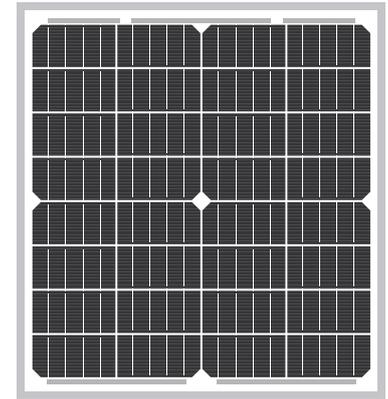


*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 *NOCT: Nominal operating cell temperature (the data is only for reference)


Dimensions in brackets are in inches.
 Un-bracketed dimensions are in millimeters.
 Unit: mm[in.]



Junction Box
Top View (Lid Open)




Section A-A

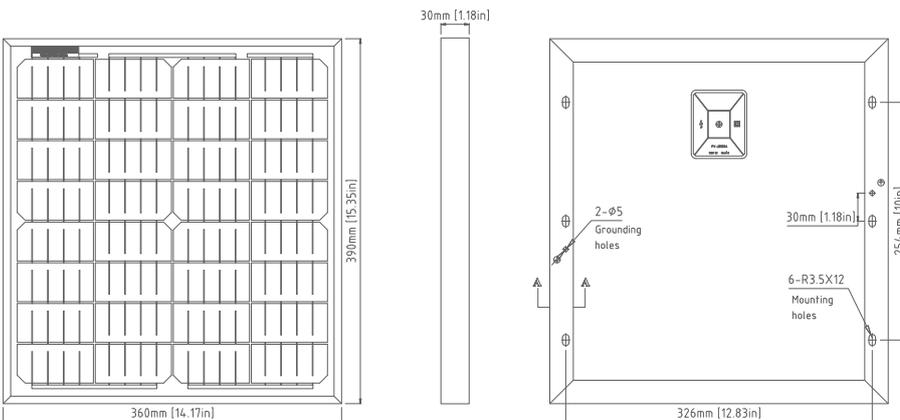

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

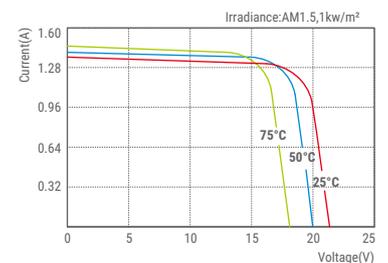

SLP020S-12U I-V Curves

Specifications	SLP020S-12U
Cells	Monocrystalline silicon solar cell
No. of cells and connections	32(4X8)
Module dimension	390mm[15.35in.]x360mm[14.17in.]x30mm[1.18in.]
Weight	1.81kg[4.00lbs]
Packing information(Carton)	440mm[17.32in.]x410mm[16.14in.]x80mm[3.15in.]/(1pc/ctn)