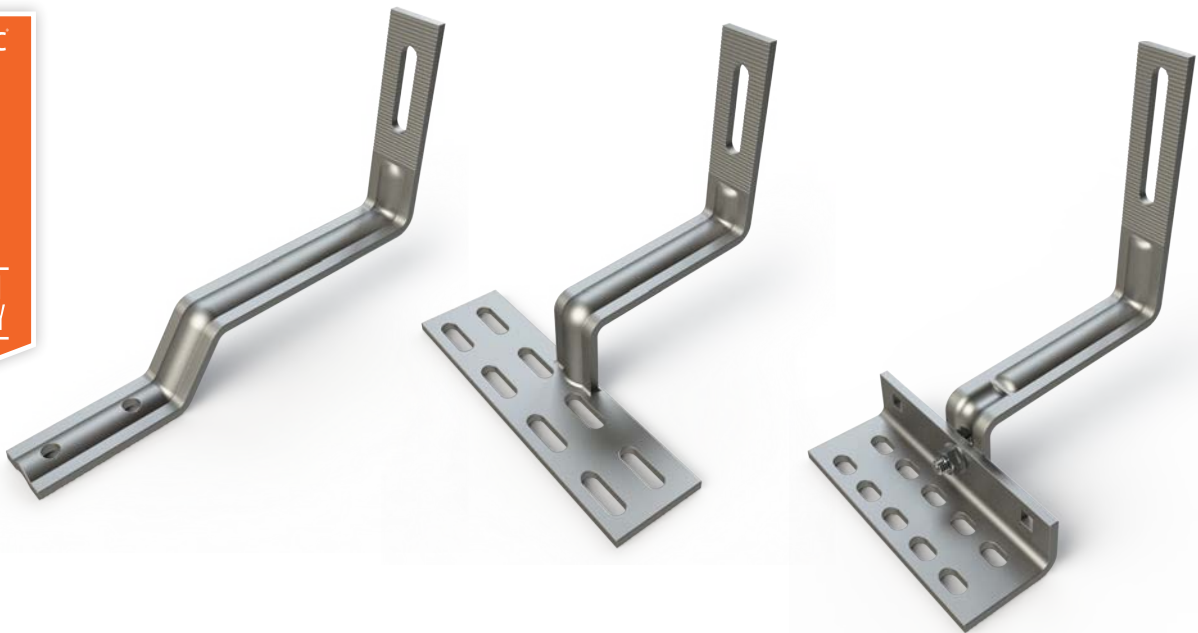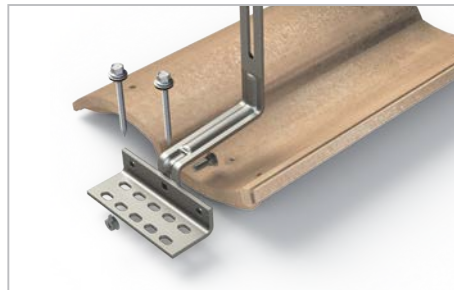# SOLARHOOKS

**UNIRAC®**

BETTER SOLAR STARTS HERE

UNIRAC Pro Series **SOLAR**HOOKS is a complete line of attachment solutions for tile roofs. Featuring UNIRAC's exclusive **POWER**ARCH technology which increases strength by up 60% more than traditional tile hooks, **SOLAR**HOOKS are simple to install and designed for maximum convenience. Available in universal designs and in specific shapes for flat, S and W tiles, **SOLAR**HOOKS are kitted with stainless lag bolts and have a bead blasted stainless steel finish. With **SOLAR**HOOKS, you have everything you need for a quick, professional installation.
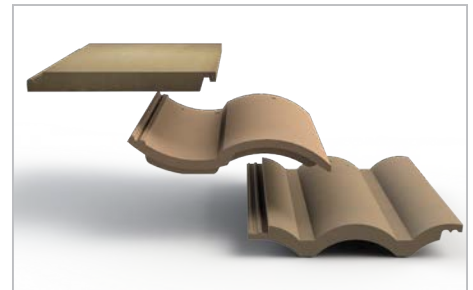
**UNIRAC 25 YEAR FULL-SYSTEM WARRANTY**

**NEW & IMPROVED**

### UP TO 60% STRONGER
Exclusive **POWER**ARCH technology ensures no array rattling or broken tiles during high winds.

### SIMPLE AND VERSATILE
Multiple hole patterns and slotted connections provide adjustability. Stainless steel lag bolts bring long term peace of mind.

### EXTENSIVE ASSORTMENT
Available in a variety of universal, flat tile & Spanish tile designs to handle any challenge.

# THE COMPLETE TILE ROOF SOLUTION

# PRO SERIES
# SOLARHOOKS

## APPLICATION GUIDE

| MODEL | SOLARHOOK UNIV SIDE MT CT5 | SOLARHOOK FLAT SIDE MT AT1 | SOLARHOOK SPANISH SIDE MT CT1 | SOLARHOOK FLAT SIDE MT ST1 | SOLARHOOK FLAT ADJUSTABLE SIDE MT ST1 | SOLARHOOK SPANISH SIDE MT CT2 |
|---|---|---|---|---|---|---|
| PART NUMBER | 004CT5H | 004AT1H | 004CT1H | 004ST1S | 004AST1 | 004CT2H |
| MATERIAL | Bead Blasted 304 Stainless Steel | Bead Blasted 304 Stainless Steel | Bead Blasted 304 Stainless Steel | Bead Blasted 304 Stainless Steel | Bead Blasted 304 Stainless Steel | Bead Blasted 304 Stainless Steel |
| APPLICATION | Best in low – med wind / snow regions | Best in low – med wind / snow regions | Best in low – med wind / snow regions | Best in low – med wind / snow regions | Best in low – med wind / snow regions | Best in low – med wind / snow regions |
| USES EXISTING TILES | Yes | Yes | Yes | Yes | Yes | Yes |
| RAIL OR RAIL-LESS | Rail | Rail | Rail | Rail | Rail | Rail |
| DIRECT MOUNT, NO L-FOOT REQUIRED | ✔ | ✔ | ✔ | ✔ | ✔ | ✔ |
| ADJUSTABLE | ✔ | | | | ✔ | |
| FLAT TILE | ✔ | ✔ | | ✔ | ✔ | |
| S TILE | ✔ | | ✔ | | | ✔ |
| W TILE | ✔ | | ✔ | | | |
| UNIVERSAL TILE | ✔ | | | | | |
| SIMPLE INSTALLATION | ✔ | ✔ | ✔ | ✔ | ✔ | ✔ |
| NO TILE MOD. REQUIRED | ✔ | ✔ | ✔ | ✔ | ✔ | ✔ |
| WARRANTY | 25-Year | 25-Year | 25-Year | 25-Year | 25-Year | 25-Year |

# THE COMPLETE TILE ROOF SOLUTION