

# **MOTIVE L16-AGM**

MODEL L16-AGM

VOLTAGE 6

CAPACITY 370Ah @ 20Hr MATERIAL Polypropylene

BATTERY VRLA AGM / Non-Spillable / Maintenance-Free

COLOR Maroon

WATERING No Watering Required







## 6 VOLT

#### **PHYSICAL SPECIFICATIONS**

BCI	MODEL NAME	TERMINAL TYPE G	DIMENSIONS © INCHES (mm)			WEIGHT   LBS. (kg)	HANDLES	INSTALLATION ORIENTATION
			LENGTH	WIDTH	HEIGHT F			Horizontal
903	L16-AGM	M8/DT/LT	11.66 (296)	6.94 (176)	16.41 (417)	114 (52)	Braided Rope	and Vertical

#### **ELECTRICAL SPECIFICATIONS**

VOLTAGE	TAGE Cranking Performance Capa		Capacity	<sup>A</sup> Minutes	CAPACITY <sup>B</sup> AMP-HOURS (Ah)			1)	ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
6	C.C.A. <sup>D</sup> @0°F	C.A. <sup>E</sup> @32°F	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	1.7	3650
0	_	_	817	215	290	323	370	392	2.35	1.7	

#### **CHARGING INSTRUCTIONS**

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)					
SYSTEM VOLTAGE	6V 12V 24V		36V	48V	
Maximum Charge Current (A)	20% of C <sub>20</sub>				
Absorption Voltage (2.40 V/cell)	7.20	14.40	28.80	43.20	57.60
Float Voltage (2.25 V/cell)	6.75	13.50	27.00	40.50	54.00

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

### **CHARGING TEMPERATURE COMPENSATION**

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

#### **OPERATIONAL DATA**

OPERATING TEMPERATURE		SELF DISCHARGE		
	-4°F to 122°F (-20°C to +50°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Less than 3% per month depending on storage temperature conditions		

#### **RECYCLE RESPONSIBLY**









#### **STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE**

PERCENTAGE CHARGE	CELL	6 VOLT
100	2.14	6.42
75	2.09	6.27
50	2.04	6.12
25	1.99	5.97
0	1.94	5.82


#### TROJAN L16-AGM PERFORMANCE

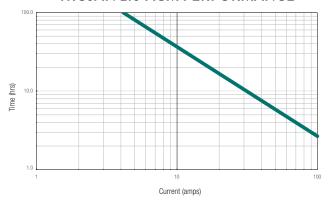


#### PERCENT CAPACITY VS. TEMPERATURE

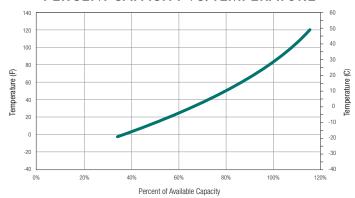

#### **BATTERY DIMENSIONS** (shown with DT)

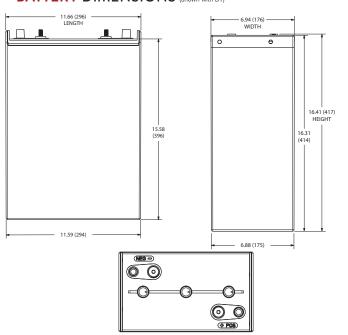

#### SELF DISCHARGE VS. TIME

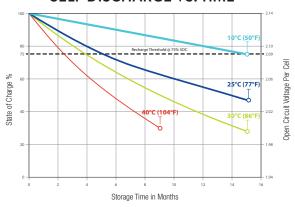

#### TERMINAL CONFIGURATIONS<sup>6</sup>

15	M8	M8
		Battery Height with Terminal in Inches (mm) 15.97 (406) Torque Values in-Ib (Nm) Bolt: 85 – 90 (10 – 11)
15	M8	M8 WITH LT ADAPTER (ADAPTER PROVIDED BUT NOT INSTALLED)
		Battery Height with Terminal in Inches (mm) 15.15 (385)  Torque Values in-Ib (Nm) Connection to M8: 85 – 90 (10-11) Connection to LT: 65 – 75 (7.5 – 8.5)  Bolt Size  M8 x 1.25

DT **AUTOMOTIVE POST & STUD Battery Height with Terminal in Inches (mm)** 16.41 (417) Torque Values in-lb (Nm) Connected to Stud: 95 - 105 (11 - 12) Connected to AP: 50 - 70 (6 - 8) **Bolt Size** 5/16"

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are
- based on peak performance.

  The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20-Hour rate and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

  Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- C.C.A. (Cold Cranking Amps) the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above 1.2 CAL Clothaning Arrips: The deschage lower in amperes which a reve, may view got battery 2 and maintain to 30 seconds at 32 Vickell. This is sometimes referred to as marine cranting amps @ 32°F or M.C.A. @ 32°F. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal. Terminal images are representative only.

- A boost charge should be performed every 6 months when batteries are in storage.
- Weight may vary.











Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.

