

PRELIMINARY

## The Panasonic Advantage



### Higher Module Efficiency

Superior module efficiency of 21.2% and 20.6%, respectively, allows maximum power production with less roof space. With one of the industry's lowest annual degradation rates, power output of at least 92% is guaranteed after 25 years.



### TripleGuard 25-Year Warranty<sup>1</sup>

A long-term warranty is only as reliable as the company behind it. TripleGuard covers EverVolt panels for performance, product, parts and labor for 25 years. Whether in year three or year 25, your Panasonic warranty will be there when you need it.



### High Efficiency in High Temperatures

Produce more energy throughout the day even on the hottest days in the warmest climates. EverVolt solar panels outperform others when temperatures rise due to our industry-leading 0.26%/°C temperature coefficient.



### Heterojunction Cell Technology

Half-cut cells with heterojunction technology minimizes electron loss, maximizes conversion efficiency, and produces considerably higher power output over conventional panels.



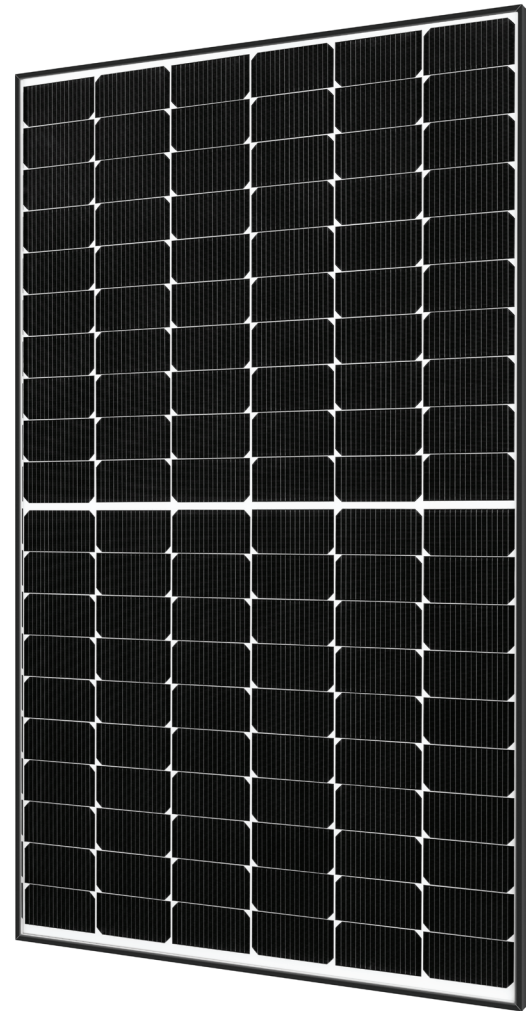
### Durability & Quality Assurance

N-type cells result in minimal Low Induced degradation (LID) and Potential Induced degradation (PID), which supports reliability and longevity. As a solar pioneer for over 40 years, Panasonic EverVolt solar panels are backed by innovation, experience and a brand you can trust.



### Improved Performance When Shaded

Continuous power production in shaded areas for greater energy yields and output. More sunlight absorption means more clean power to your home.



**PRELIMINARY**
**ELECTRICAL SPECIFICATIONS**

| Model                           | EVPV370     | EVPV360 |
|---------------------------------|-------------|---------|
| Rated Power (Pmax) <sup>1</sup> | 370W        | 360W    |
| Maximum Power Voltage (Vpm)     | 37.7V       | 37.0V   |
| Maximum Power Current (Ipm)     | 9.81        | 9.72    |
| Open Circuit Voltage (Voc)      | 44.1        | 44.0    |
| Short Circuit Current (Isc)     | 10.42       | 10.37   |
| Temperature Coefficient (Pmax)  | -0.26 %/°C  |         |
| Temperature Coefficient (Voc)   | -0.24 %/°C  |         |
| Temperature Coefficient (Isc)   | 0.04 %/°C   |         |
| NOCT                            | 44°C (±2°C) |         |
| CEC PTC Rating                  | TBD         | TBD     |
| Module Efficiency               | 21.2%       | 20.6%   |
| Maximum System Voltage          | 1000V       |         |
| Maximum Series Fuse             | 25 A        |         |
| Watt Class Sorting              | -0/+5       |         |

**MECHANICAL SPECIFICATIONS**

|                                     |   |
|-------------------------------------|---|
| Junction Box                        | 3-part, 3 bypass diodes, IP67 rated in accordance with IEC 62790                                    |
| Connector Type                      | Stäubli MC4 PV-KBT4/KST4 (4 mm <sup>2</sup> ) in accordance with IEC 62852 IP68 only when connected |
| Cable Size / Type                   | 4 mm <sup>2</sup> solar cable, 1.0 m + 1.2 m in accordance with EN 50618                            |
| Max Snow Load [+] <sup>2</sup>      | 146 psf (7000 Pa) <sup>+</sup>  |
| Max Wind Load [-] <sup>2</sup>      | 83 psf (4000 Pa) <sup>+</sup>   |
| Dimensions LxWxH                    | 67.8 x 40.0 x 1.2 in (1721 x 1016 x 30 mm)  |
| Weight                              | 43.0 lbs (19.5 kg)  |
| Pallet Dimensions LxWxH             | 70 x 42 x 48 in   |
| Quantity per Pallet / Pallet Weight | 33 pcs./1512 lbs. (686 kg)  |
| Quantity per 40' Container          | 858 pcs   |

<sup>+</sup>Test Load. Design Load should be multiplied by two thirds.

**OPERATING CONDITIONS AND SAFETY RATINGS**

|                         |   |
|-------------------------|---|
| Certifications          | IEC 61215:2016, IEC 61730:2016, UL 1703, UL 61730, IEC 62804 (PID), IEC 61701 (Salt Mist), IEC 62716 (Ammonia Resistance), ISO 11925-2 (Ignitability Class E), UNI 8457/9174 (Ignitability Class 1), IEC 62782 (Dynamic Mechanical Load), IEC 61215-2:2016 (Hailstone 35mm), AS4040.2 NCC 2016 (Cyclic Wind Load) |
| Operating Temperature   | -40°F to 185°F (-40°C to 85°C)  |
| Limited Warranty        | 25' Yrs Workmanship and Power Output (Linear) <sup>***</sup>  |
| Power Output in Year 1  | 98%   |
| Annual Degradation      | 0.25%   |
| Power Output in Year 25 | 92%   |

NOTE: Values at standard test conditions (STC: air mass AM1.5 irradiance 1000W/m<sup>2</sup>, temperature 25°C) based on production spread with a tolerance at Pmax, Voc & Isc ±3% within one watt class.

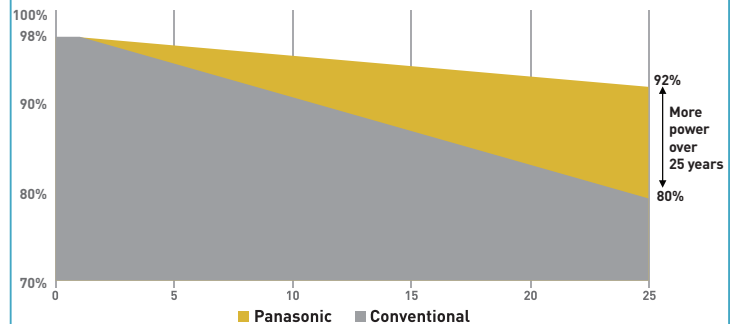
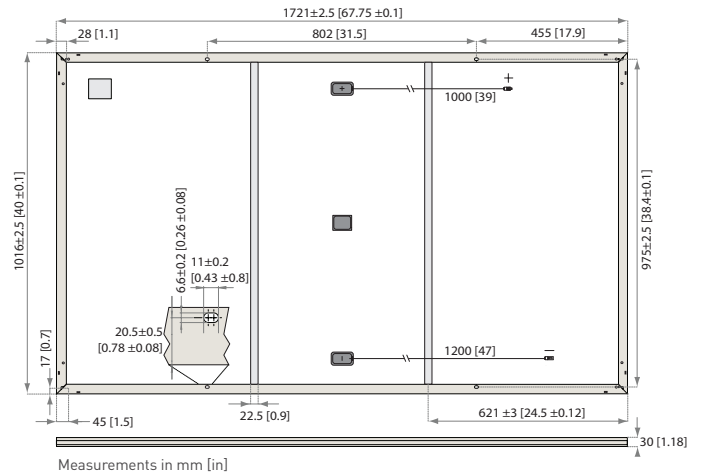
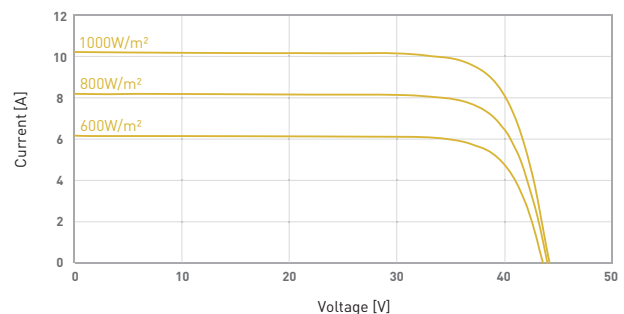
<sup>1</sup> Maximum power at delivery. For guarantee conditions, please check our guarantee document.

<sup>2</sup> Installation need to be registered through our website [www.panasonicusahitwarranty.com](http://www.panasonicusahitwarranty.com) within 60 days in order to receive twenty-five (25) year Product workmanship. Otherwise, Product Workmanship will be only fifteen (15) years.

<sup>3</sup> Equipment must be installed by a Panasonic Authorized, Premium, or Elite installer and registered at [www.panasonicusahitwarranty.com](http://www.panasonicusahitwarranty.com) within 60 days in order to receive twenty-five (25) year TripleGuard warranty.

<sup>4</sup> Refer to installation manual for detailed mechanical loading information

<sup>5</sup> 1st year 98%, after 2nd year 0.25% annual degradation to year 25.

**PERFORMANCE WARRANTY**

**DIMENSIONS**

**DEPENDENCE ON IRRADIANCE**


Reference data for model : EVPV360  
Cell temperature : 77°F (25°C)



NOTE: Specifications and information above may change without notice.

**CAUTION!** Please read the installation manual carefully before using the products.

Used electrical and electronic products must not be mixed with general household waste. For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.