

SOLAR'S MOST TRUSTED



REC N-PEAK 2 BLACK SERIES

PREMIUM FULL BLACK MONO
N-TYPE SOLAR PANELS



MONO N-TYPE: THE
MOST EFFICIENT C-SI
TECHNOLOGY



NO LIGHT INDUCED
DEGRADATION



SUPER-STRONG
FRAME UP TO 7000 PA
SNOW LOAD




FLEXIBLE
INSTALLATION
OPTIONS



FEATURING REC'S
PIONEERING
TWIN DESIGN



HIGH POWER
FOR 25 YEARS

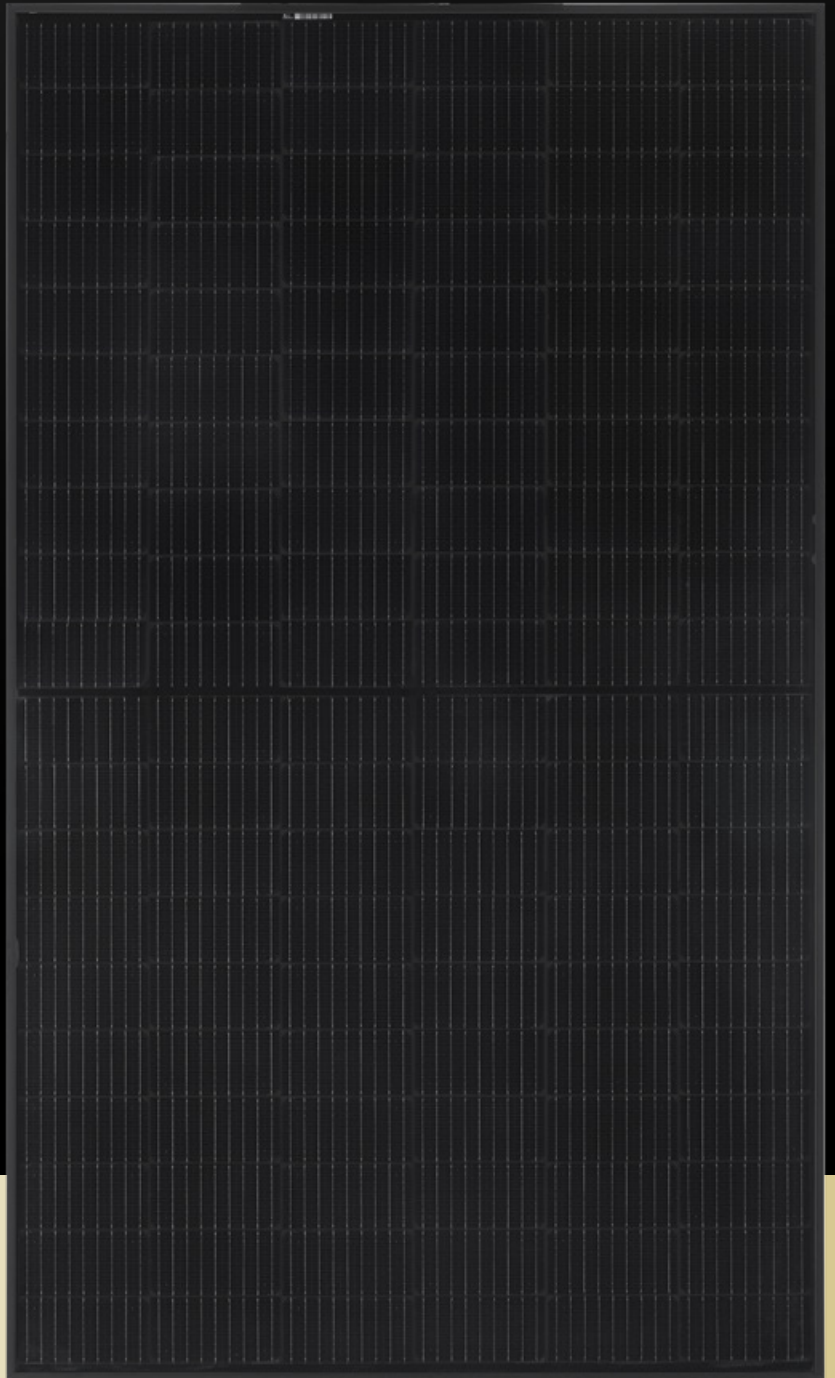


370
WP
POWER



ELIGIBLE

REC N-PEAK 2 BLACK SERIES

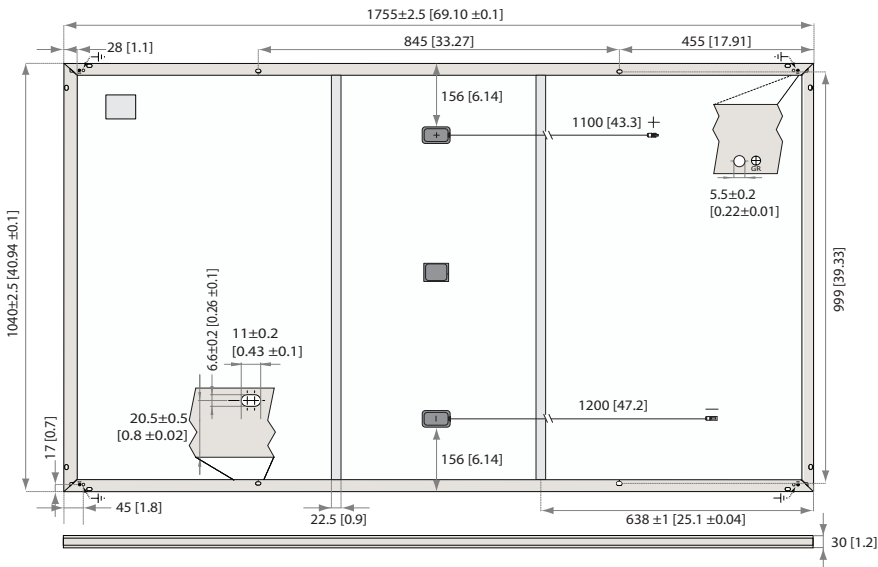

Measurements in mm [in]

ELECTRICAL DATA @ STC

Product code*: RECxxxNP2 Black

| | 355 | 360 | 365 | 370 |
|---------------------------------------|-------|-------|-------|-------|
| Nominal Power - P_{MAX} (Wp) | 355 | 360 | 365 | 370 |
| Watt Class Sorting - (W) | 0/+5 | 0/+5 | 0/+5 | 0/+5 |
| Nominal Power Voltage - V_{MPP} (V) | 33.5 | 33.9 | 34.3 | 34.7 |
| Nominal Power Current - I_{MPP} (A) | 10.60 | 10.62 | 10.65 | 10.68 |
| Open Circuit Voltage - V_{OC} (V) | 40.7 | 40.8 | 40.9 | 41.1 |
| Short Circuit Current - I_{SC} (A) | 11.27 | 11.31 | 11.36 | 11.41 |
| Panel Efficiency (%) | 19.4 | 19.7 | 20.0 | 20.3 |

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P_{MAX} , V_{OC} & I_{SC} ±3% within one watt class. * Where xxx indicates the nominal power class (P_{MAX}) at STC above.

ELECTRICAL DATA @ NOCT

Product code*: RECxxxNP2 Black

| | 268 | 272 | 276 | 280 |
|---------------------------------------|------|------|------|------|
| Nominal Power - P_{MAX} (Wp) | 268 | 272 | 276 | 280 |
| Nominal Power Voltage - V_{MPP} (V) | 31.3 | 31.7 | 32.1 | 32.5 |
| Nominal Power Current - I_{MPP} (A) | 8.56 | 8.58 | 8.60 | 8.63 |
| Open Circuit Voltage - V_{OC} (V) | 38.1 | 38.2 | 38.2 | 38.4 |
| Short Circuit Current - I_{SC} (A) | 9.10 | 9.13 | 9.18 | 9.22 |

Nominal operating cell temperature (NOCT: air mass AM1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s). * Where xxx indicates the nominal power class (P_{MAX}) at STC above.

CERTIFICATIONS

IEC 61215:2016, IEC 61730:2016, UL 61730 (Pending)
ISO 14001:2004, ISO 9001:2015, OHSAS 18001:2007, IEC 62941



WARRANTY

| | Standard | RECProTrust | |
|--|----------|-------------|----------|
| Installed by an REC Certified Solar Professional | No | Yes | Yes |
| System size | any | ≤25kW | 25-500kW |
| Product Warranty (yrs) | 20 | 25 | 25 |
| Power Warranty (yrs) | 25 | 25 | 25 |
| Labor Warranty (yrs) | 0 | 25 | 10 |
| Power in Year 1 | 98% | 98% | 98% |
| Annual Degradation | 0.25% | 0.25% | 0.25% |
| Power in Year 25 | 92% | 92% | 92% |

See warranty documents for details. Some conditions apply.

GENERAL DATA

| | |
|---------------|---|
| Cell type: | 120 half-cut mono c-Si n-type cells 6 strings of 20 cells in series |
| Glass: | 0.13" (3.2 mm) solar glass with anti-reflection surface treatment |
| Backsheet: | Highly resistant polymeric construction (black) |
| Frame: | Anodized aluminum (black) |
| Junction box: | 3-part, 3 bypass diodes, IP68 rated in accordance with IEC 62790 |
| Cable: | 12 AWG (4 mm ²) PV wire, 43 + 47" (1.1 m + 1.2 m) in accordance with EN 50618 |
| Connectors: | Stäubli MC4 PV-KBT4/KST4, 12 AWG (4 mm ²) in accordance with IEC 62852 IP68 only when connected |
| Origin: | Made in Singapore |

MECHANICAL DATA

| | |
|-------------|---|
| Dimensions: | 69.1 x 40.94 x 1.2 in (1755 x 1040 x 30 mm) |
| Area: | 19.70 sq ft (1.83 m ²) |
| Weight: | 44.0 lbs (20.0 kg) |

MAXIMUM RATINGS

| | |
|----------------------------|----------------------|
| Operational temperature: | -40 ... +85°C |
| Maximum system voltage: | 1000 V |
| Maximum test load (front): | +7000 Pa (146 psf)* |
| Maximum test load (rear): | -4000 Pa (83.5 psf)* |
| Max series fuse rating: | 25 A |
| Max reverse current: | 25 A |

* See installation manual for mounting instructions.
Design load = Test load / 1.5 (safety factor)


TEMPERATURE RATINGS *

| | |
|--|---------------|
| Nominal Operating Cell Temperature: | 44.3°C (±2°C) |
| Temperature coefficient of P_{MAX} : | -0.34 %/°C |
| Temperature coefficient of V_{OC} : | -0.26 %/°C |
| Temperature coefficient of I_{SC} : | 0.04 %/°C |

*The temperature coefficients stated are linear values

LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC.

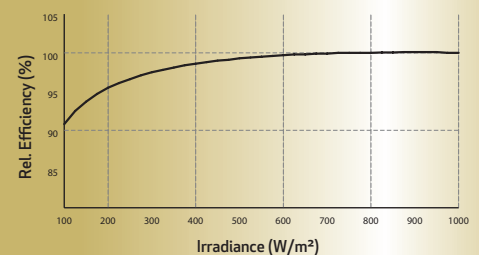

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

